


Connecting the Phone

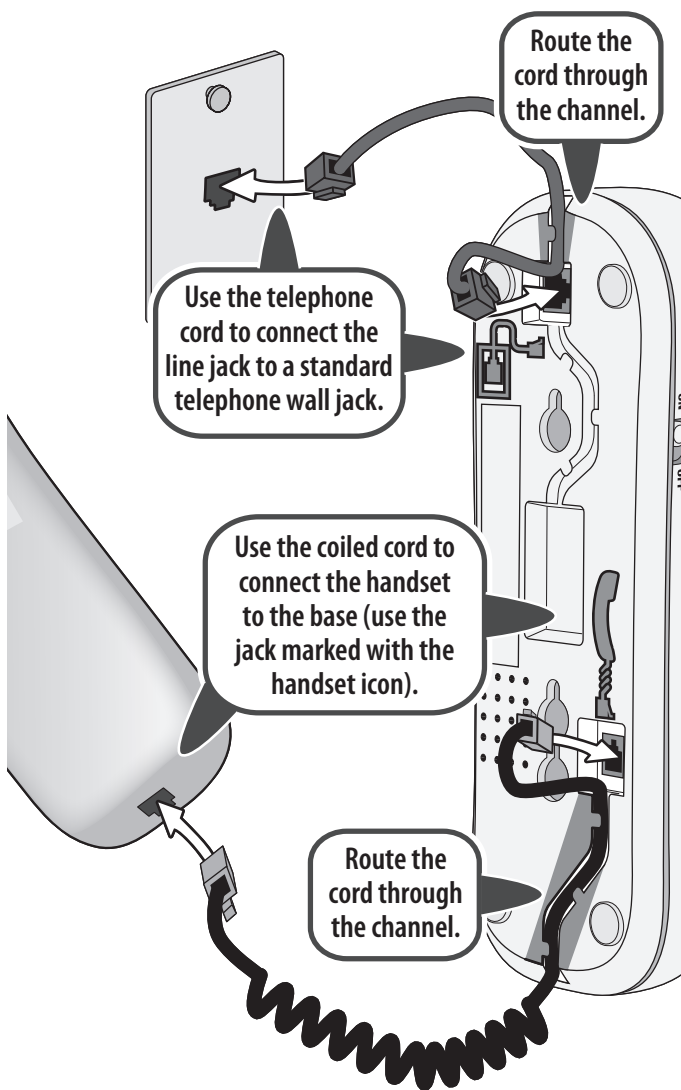

Test the connection

- 1) Pick up the handset and listen for a dial tone. If you don't hear one, check the connection between the base and the phone jack.
- 2) Make a test call. If the dial won't stop when you dial, check the **Tone/pulse** switch: if it's on tone, change it to pulse, and vice versa. Try your test call again.

If there is static or noise on the line, see the section on Solving Problems.

Changes or modifications to this product not expressly approved by Uniden, or operation of this product in any way other than as detailed by the owner's manual, could void your authority to operate this product.

Industry Canada (I.C.) Notice

Terminal equipment

NOTICE: This equipment meets the applicable Industry Canada Terminal Equipment Technical Specifications. This is confirmed by the registration number. The abbreviation, IC, before the registration number signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment.

NOTICE: The Ringer Equivalence Number (REN) for this terminal equipment is marked on the equipment itself. The REN assigned to each terminal equipment provides an indication of the maximum number of terminals allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the Ringer Equivalence Numbers of all the devices does not exceed 5.

One-year Limited Warranty

Important: Evidence of original purchase is required for warranty service. WARRANTOR: UNIDEN AMERICA CORPORATION ("Uniden") ELEMENTS OF WARRANTY: Uniden warrants, for one year, to the original retail owner, this Uniden Product to be free from defects in materials and craftsmanship with only the limitations or exclusions set out below.

WARRANTY DURATION: This warranty to the original user shall terminate and be of no further effect 12 months after the date of original retail sale. The warranty is invalid if the Product is (A) damaged or not maintained as reasonable or necessary, (B) modified, altered, or used as part of any conversion kits, subassemblies, or any configurations not sold by Uniden, (C) improperly installed, (D) serviced or repaired by someone other than an authorized Uniden service center for a defect or malfunction covered by this warranty, (E) used in any conjunction with equipment or parts or as part of any system not manufactured by Uniden, or (F) installed or programmed by anyone other than as detailed by the owner's manual for this product.

STATEMENT OF REMEDY: In the event that the product does not conform to this warranty at any time while this warranty is in effect, warrantor will either, at its option, repair or replace the defective unit and return it to you without charge for parts, service, or any other cost (except shipping and handling) incurred by warrantor or its representatives in connection with the performance of this warranty. Warrantor, at its option, may replace the unit with a new or refurbished unit. THE LIMITED WARRANTY SET FORTH ABOVE IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO THE PRODUCT AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES OF ANY NATURE WHATSOEVER, WHETHER EXPRESS, IMPLIED OR ARISING BY OPERATION OF LAW, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY DOES NOT COVER OR PROVIDE FOR THE REIMBURSEMENT OR PAYMENT OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow this exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you.

LEGAL REMEDIES: This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. This warranty is void outside the United States of America and Canada.

PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY: If, after following the instructions in the owner's manual you are certain that the Product is defective, pack the Product carefully (preferably in its original packaging). The Product should include all parts and accessories originally packaged with the Product. Include evidence of original purchase and a note describing the defect that has caused you to return it. The Product should be shipped freight prepaid, by traceable means, to warrantor at:

Uniden America Corporation
Service Department
4700 Amon Carter Blvd.
Fort Worth, TX 76155

Trimline Phone User's Guide

What's in the box?



If any items are missing or damaged, contact our Customer Care Line immediately. Never use damaged products.

Need Help? You can get answers 24/7 at our website: www.uniden.com.

If You...	Contact Uniden's...	Phone
have a question or problem	Customer Care Line*	800-297-1023
need a part or accessory	Parts Department*	800-554-3988
need special assistance due to a disability	Accessibility Help Line	800-874-9314 (voice or TTY)

* During regular business hours, Central Standard Time. Visit our website for detailed business hours.

Important safety precautions

When using your telephone equipment, always follow basic safety precautions to reduce the risk of fire, electric shock and injury to persons, including the following:

- ▶ Do not use this product near water, for example, near a bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool.
- ▶ Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
- ▶ Do not use the telephone to report a gas leak in the vicinity of the leak.

SAVE THESE INSTRUCTIONS


Uniden works to reduce lead content in our PVC coated cords in our products and accessories.

Warning! The cords on this product and/or accessories contain lead, a chemical known to the State of California to cause birth defects or other reproductive harm. Wash hands after handling.

Uniden® is a registered trademark of Uniden America Corporation.

The pictures in this manual are used for examples only. Your actual phone may not look exactly like the pictures.

Using the Phone

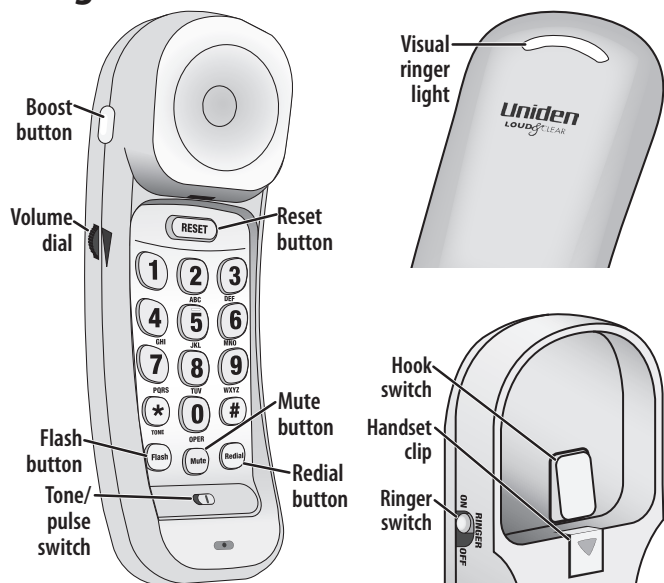

Button	What it does
Boost and Volume dial	These controls work together to change the volume. See <i>Changing the Audio Volume</i> .
Flash	During a call: switch to a waiting call
Tone/pulse	Change the dial mode (see <i>Solving Problems</i> .)
Reset	During a call: Hang up the current call and get a dial tone.
Mute	During a call: press & hold to mute the microphone so callers can't hear you. Release to turn the microphone back on.
Redial	Redial the last number.
Ringer	Turn the audio ringer (but not the visual ringer) off or on.

Using Call Waiting

Call waiting is service provided by your local telephone provider; contact your telephone provider to subscribe to this service.

If you get a Call Waiting call, the handset beeps. Press **Flash** to switch between the current call and the waiting call; each time you switch, there's a short pause before you're connected to the other caller.


Changing the Audio Volume

During a call, press **Boost** to activate the **Volume dial**. Use the dial to change the volume. When you're finished, press **Boost** again to deactivate the **Volume dial**.

Wall-Mounting the Phone

You can mount the phone on any standard telephone wall plate where the pins are 100 mm (3¹⁵/₁₆ inches) apart.

Before putting the handset in the cradle, you need to switch the handset clip into wall mount mode as shown in the drawing below.

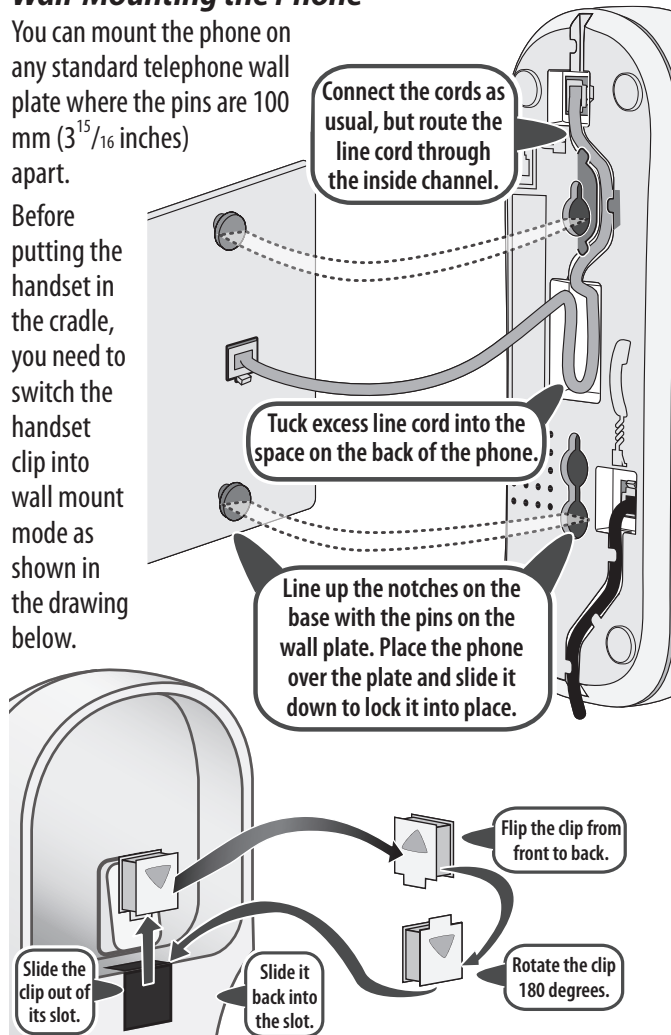

Solving Problems

If you have any trouble with your phone, try these simple steps first. If you still have a question or problem, call the Customer Hotline listed on the front page.

Problem	Things to try
I keep hearing a dial tone when I try to make a call.	Checking the Tone/pulse switch: if it's on tone, change it to pulse and try again.
The phone rings, but I can't hear anything.	Checking the coiled cord connection between the base and the handset.

If there's static on the line

DSL broadband Internet service can cause static on telephones, but a **DSL filter** usually solves any problems. To get a DSL filter, call your DSL provider or look in any electronics store.

To install the filter, plug the DSL filter into the wall jack and then plug your phone into the filter. Make a test call to see if the noise is gone.



What Else Do I Need to Know?

FCC compliance information

Part 68 information

This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On the bottom of this equipment is a label that contains, among other information, a product identifier in the format US:6NYTE##BXXXXXX (where XXXXXX stands for a specific model number). If requested, this number must be provided to the telephone company.

An applicable Universal Service Order Codes (USOC) certification for the jacks used in this equipment is provided (i.e., RJ11C) in the packaging with each piece of approved terminal equipment. A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for details.

The REN is used to determine the number of devices that may be connected to a telephone line. Excessive RENs on a telephone line may result in the devices not ringing in response to an incoming call. In most but not all areas, the sum of RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to a line, as determined by the total RENs, contact the telephone provider. The REN for this product is part of the product identifier that has the format US:6NYTE##BXXXXXX. The digits represented by ## are the REN without a decimal point (e.g., 18 is a REN of 1.8).

If this equipment causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary. The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens the telephone company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service.

If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved.

Follow instructions for repairing, if any (e.g. battery replacement section); otherwise do not substitute or repair any parts of the device except as specified in this manual. Should you experience trouble with this equipment, contact Uniden customer service at 800-297-1023 to arrange repairs. All repairs must be done by Uniden or an authorized agent.

Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service commission or corporation commission for information. This equipment is hearing aid compatible.

NOTICE: According to telephone company reports, AC electrical surges, typically resulting from lightning strikes, are very destructive to telephone equipment connected to AC power sources. To minimize damage from these types of surges, a surge arrestor is recommended.